# ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0406

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

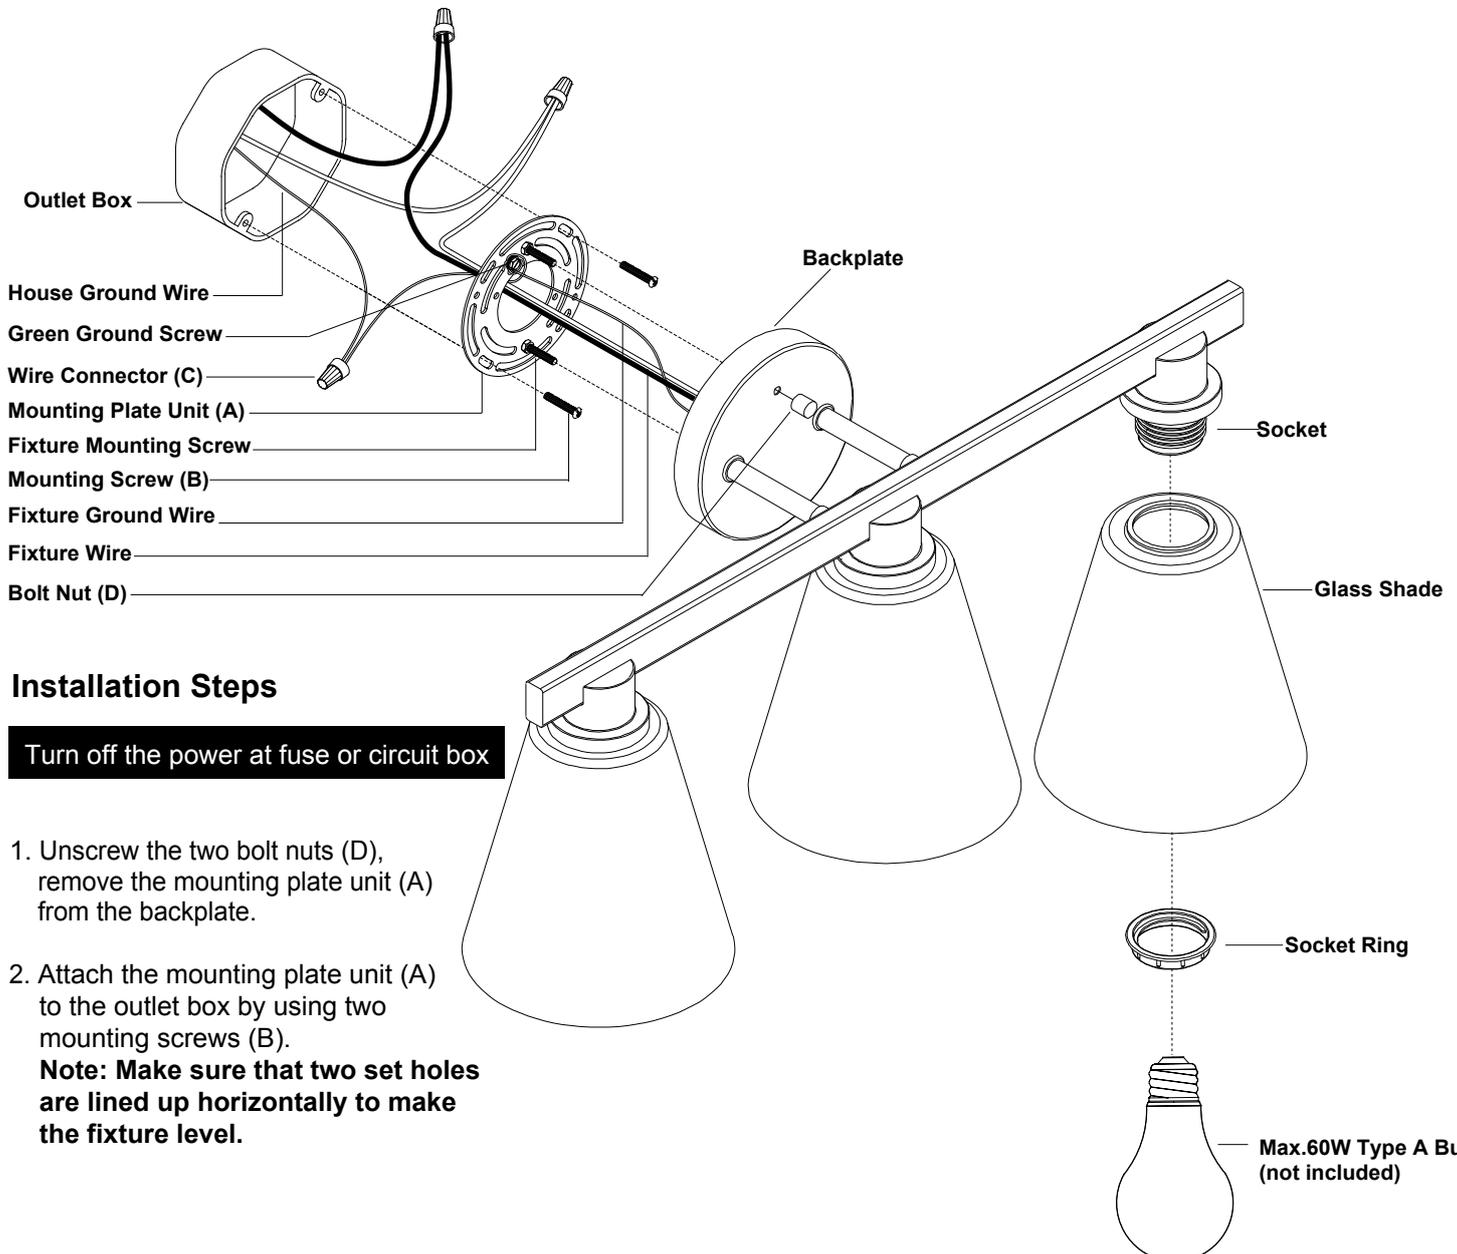## Hardware Package (included):

Mounting Plate Unit (A)   Mounting Screw (B)   Wire Connector (C)   Bolt Nut (D)

Outlet Box

Backplate

House Ground Wire
Green Ground Screw
Wire Connector (C)
Mounting Plate Unit (A)
Fixture Mounting Screw
Mounting Screw (B)
Fixture Ground Wire
Fixture Wire
Bolt Nut (D)

Socket

Glass Shade

Installation Steps

Turn off the power at fuse or circuit box

1. Unscrew the two bolt nuts (D), remove the mounting plate unit (A) from the backplate.

2. Attach the mounting plate unit (A) to the outlet box by using two mounting screws (B).
Note: Make sure that two set holes are lined up horizontally to make the fixture level.

Socket Ring

Max.60W Type A Bulb
(not included)

VAXCEL

220115

3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
    • Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
    • Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
    • Attach the fixture ground wire (bare wire) to the mounting plate unit (A) with the green ground screw, then
      connect it to the house ground wire with the wire connector (C).
    Carefully put all of the wires back into the outlet box.

4. Attach the backplate of the fixture to the mounting plate unit (A) by aligning and inserting the two fixture mounting
   screws into set holes on backplate, then secure it with two bolt nuts (D).

5. Attach the glass shade to the fixture, and secure them with the socket rings.

6. Install 3 x 60W max.medium base bulbs (not included). Check relamping label at socket area or packaging for
   maximum wattage allowed.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

Mounting Plate Unit (A)   Mounting Screw (B)   Wire Connector (C)   Bolt Nut (D)

Mounting Hardware
6470MM (1SET)

Glass
10280CS

A: 10"

B: 23"

C: 7"

VAXCEL

220115